


TD-(650-670)MD-132HC

TD - SNOW

Tide solar redefines the high efficiency module range by combining 210mm cells with PERC and half cell technology.

The combination of innovative technology has effectively improved module efficiency and power output.

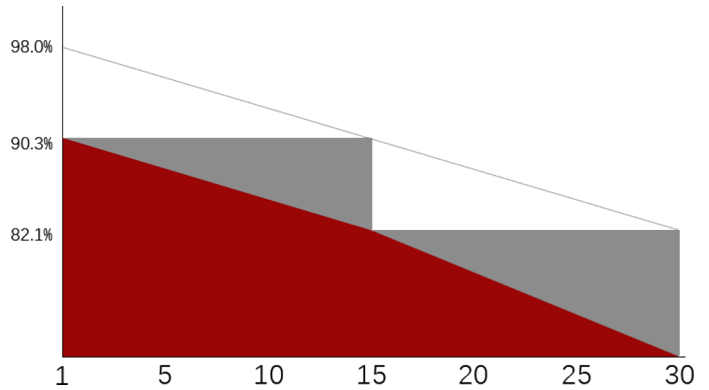


LINEAR PERFORMANCE WARRANTY

15 YEAR PRODUCT WARRANTY

30 YEAR LINEAR POWER WARRANTY

MODULE SIZE

2384x1303x35mm

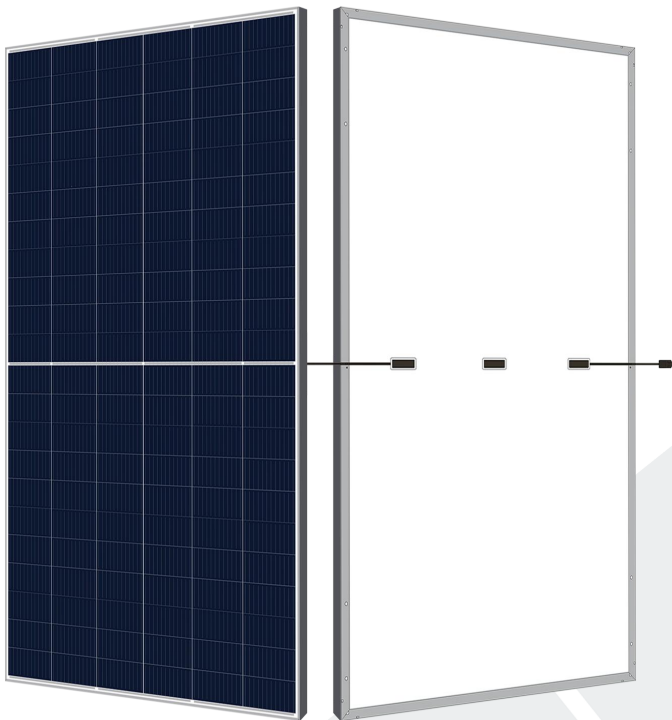

132 CELL
MONOCRYSTALLINE MODULE


650W-670W
POWER OUTPUT RANGE

21.6%
MAXIMUM EFFICIENCY

0 ~ +3%
POSITIVE POWER TOLERANCE



MAIN CHARACTERISTICS



Competitive Low Light Performance



Reduced BOS & Increased ROI




Reduced Power Loss by Minimising the Effect of Shadow Shading



High Density Encapsulation




2400pa Wind Load
5400pa Snow Load



Multi-Busbar Technology

DIMENSIONS OF PV MODULE

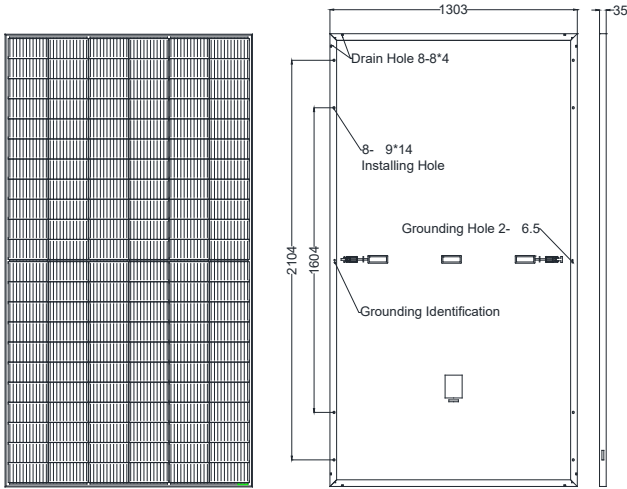

STRUCTURAL CHARACTERISTICS

Module Size	2384x1303x35mm
Weight	32kg
Cell	single crystal PERC210x105mm (132pieces)
Glass	3.2mm tempered coated glass, low iron
Frame	anodized aluminum alloy
Junction Box	IP68, 3 diodes
Output Lead	4.0mm ² 1200mm(+) / 1200mm(-) or customized
Mechanical Load	front 5400pa / back 2400pa

ELECTRICAL CHARACTERISTICS

Component Model	TD-650MD-132HC	TD-655MD-132HC	TD-660MD-132HC	TD-665MD-132HC	TD-670MD-132HC
Maximum Power (PMP)	650	655	660	665	670
Open Circuit Voltage (VOC)	45.0	45.2	45.4	45.6	45.8
Short Circuit Current (ISC)	18.39	18.43	18.47	18.51	18.55
Maximum Power Voltage (VMP)	37.6	37.8	38.0	38.2	38.4
Maximum Power Current (IMP)	17.29	17.33	17.37	17.41	17.45
Component Efficiency (η_c)	20.9	21.1	21.3	21.4	21.6
Power Tolerance	(0, +3%)				
Maximum System Voltage	1500V DC				
Maximum Rated Fuse Current	30 A				
STC: Irradiance 1000 W/ m ² module temperature 25 °C AM=1.5					

TEMPERATURE CHARACTERISTICS

Maximum Power Temperature Coefficient	-0.35 % / °C
Temperature Coefficient Of Open Circuit Voltage	-0.27 % / °C
Temperature Coefficient Of Short Circuit Current	+0.05 % / °C
Working Temperature	-40 ~ +85 °C
Nominal Operating Cell Temperature (NOCT)	45 ± 2 °C

PACKING METHOD

Module Size	2384x1303x35mm
Container	40' HQ
Quantity Per Pallet	31*
Number Of Pallets Per Container	18
Quantity Per Container	558

I-V Curve

